

TYPICAL MAXIMUM SECTION
SCALE 1:500
DRAFT

Maximum Flood Level

MFL 69.90

TOP OF WALL RL 70.50

EXCAVATION LEVEL RL 66.90


EXISTING PARAPET WALL

NEW CONCRETE PARAPET WALL

3000

Full Service Level
(normal water level
remains unchanged)


FSL 61.50

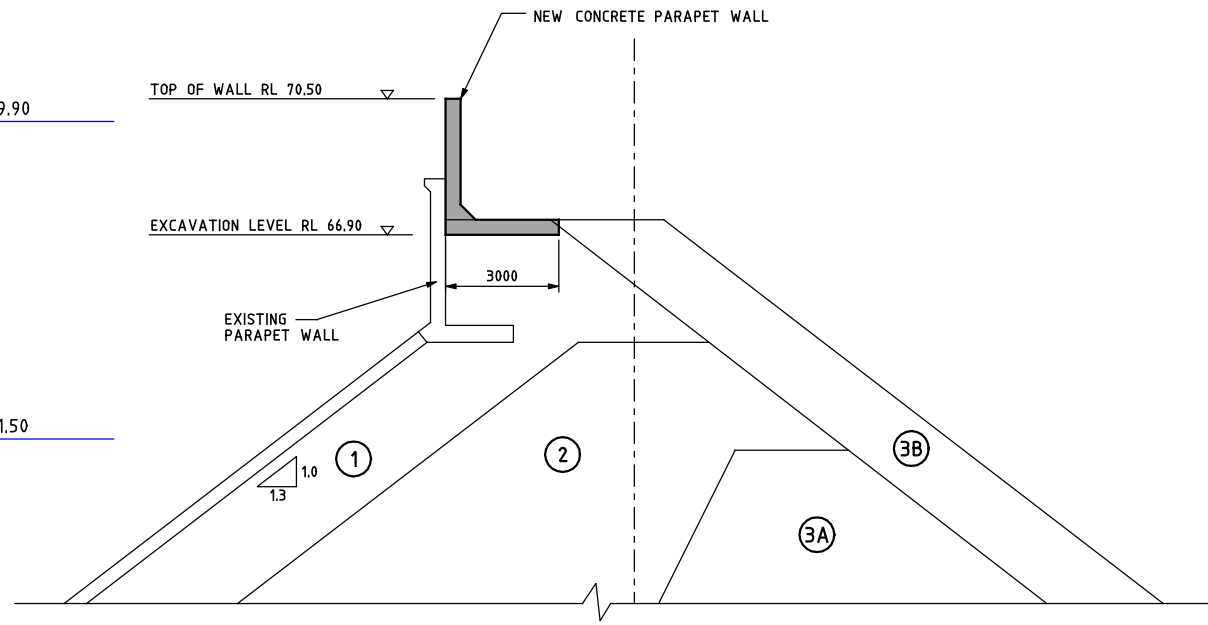

DETAIL
SCALE 1:20

LEGEND

FUNCTION	DESCRIPTION
① SEMI-PERMEABLE ZONE	MODERATELY WEATHERED RHYOLITE
② PERMEABLE INTERMEDIATE ZONE	SLIGHTLY WEATHERED TO MODERATELY WEATHERED RHYOLITE
③A FRESH ROCK ZONE	FRESH RHYOLITE
③B MESH ZONE AND FACE ZONE	SELECTED FRESH RHYOLITE

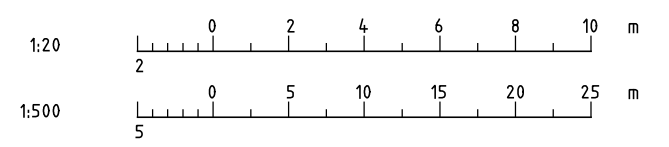

**CLARRIE HALL DAM
SPILLWAY UPGRADE**

**OPTION 3 - EMBANKMENT
SECTIONS**

g:\s\water\tec\docad\CLARRIE HALL SPILLWAY UPGRADE\Fig for PRESENTATION\CLHALL_FIG12.dgn
ZhengC2
28/03/2011 1:22:41 PM